ASIA PACIFIC INDUSTRY GROUP CO., LIMITED
Tel +0086-551-64687285
Email sales@boppfilmsales.com
www.boppfilmsales.com · www.apigcl.com

# 3_API-0.66K-Φ Split current transformer（5A）

## 产品技术资料 — 技术资料

| Document No. 文件编号 | Revision 版本 | Issue date 签发日期 | Document type 文件类型 |
|---|---|---|---|
| APIG-RD-20250527205624-2026 | Rev. 2.0 | 2026-11-09 | Technical Document / 技术资料 |

## 1 • DOCUMENT INFORMATION 文档信息

| Item 项目 | Description 说明 |
|---|---|
| Document type 文件类型 | Technical Document / 技术资料 |
| Subject 主题 | 3_API-0.66K-Φ Split current transformer（5A） |
| Specification basis 规格依据 | APIG product specification 亚太工业集团产品规格 |
| Issue 签发 | 2026-11-09 · Rev. 2.0 |
| Language 语言 | Bilingual headings — English / 中文 |

## 2 • TECHNICAL CONTENT 技术内容

| Specification | Ratedcurrentratio | Precisiondegree | Column 4 | Straight - through | Max cable . outerdiameter |
|---|---|---|---|---|---|
| | tums | (mm) | | | |
| 1 | | | | | |
| (150 200)A/5(1)A | 1 | 1 | | | Φ24 |
| 15 | 1 | | | | |
| (300 400)A/5(1)A | 15 | 1 | | | Φ36 |
| 15 | 1 | | | | |
| 500A/5(1)A | 15 | 1 | | | Φ50 |
| 25 | 1 | | | | |
| 5 | 1 | | | | |
| 10 | 1 | | | | |

Product / packing view 1 产品 / 包装实拍 1

1 API-0.66/K-Φ Split current transformer 1.Product feature The appearance is nice and the installation and wiring are convenient. API-0.66/K-Φ series split current transformers are mainly used in reconstructing projects of urban and rural power grids. Product has the advantages of small size, high accuracy, strong load capacity, easy installation, etc.They save the manpower, material resources and financial resources and improve the efficiency of users. 2.Explanation for type 3. Spec. and size Note: Primary current flow from P1 to P2. The black second wiring is S2,the red is S1.The outlet length is 1m ± 10cm. Outline size Through size Tolerance W H D M N Φ1 Φ2 K-Φ24 39 70.5 55 36 52 24.5 23 ±1 K-Φ36 42.5 81.5 67 40 56 33.5 35 K-Φ50 46.5 110 90 54 66.5 47 52 Size（mm） Type Rated current ratio Split Rated voltage,kV Code of product series 2 4.Cross-reference tables of spec.

以下数据为本产品技术规格，随货签发检验记录。

–parameter 5.Technical indicators □ Rated operation voltage AC 0.66kV □ Rated frequency 50-60Hz □ Ambient air temperature -30℃-70℃ □ Height above sea level≤3000m □ Power frequency withstand voltage 3000v/1min 50Hz □ Used in place without direct rain and snow,without severe pollution and acute shock 6.Installation Rated current ratio (A) Precision degree Straight- through tums Max. cable outer diameter (mm) 0.5 1 K-Φ24 (150-200)A/5(1)A 1 1 Φ24 (250-300)A/5(1)A 1.5 1 K-Φ36 (300-400)A/5(1)A 1.5 1 Φ36 (500-600)A/5(1)A 1.5 1 K-Φ50 500A/5(1)A 1.5 1 Φ50 (600-700)A/5(1)A 2.5 1 (800-900)A/5(1)A 5 1 1000A/5(1)A 10 1

## 3 • NOTES 说明

**ASIA PACIFIC INDUSTRY GROUP CO., LIMITED**
Tel +0086-551-64687285
Email sales@boppfilmsales.com
www.boppfilmsales.com · www.apigcl.com

This document states the standard specification of the product. Values apply to the grades listed here; the tolerance range agreed in the order confirmation and the technical agreement prevails for any specific order. Batch test records are issued with the goods on request.

## PHOTOS 实拍图片

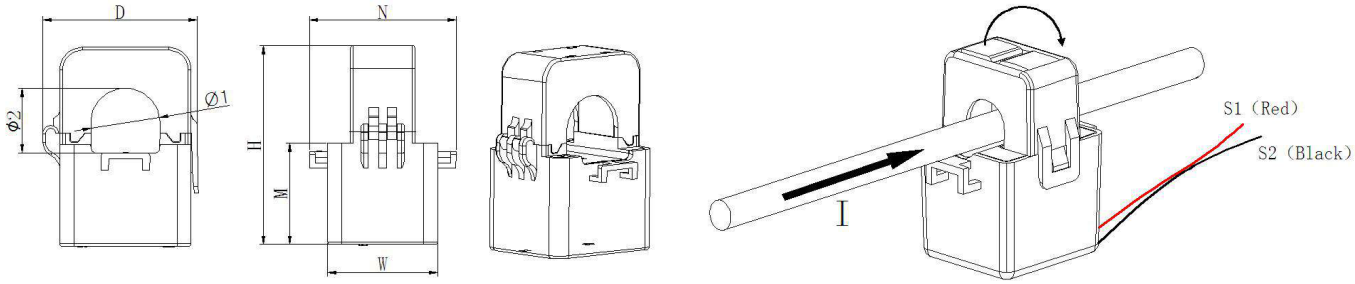


Product view 1 产品实拍 1

**地址 ADD.:** No.3399, Luzhou Ave., Baohe Dist., Hefei, Anhui 230051, China | 安徽省合肥市包河区庐州大道3399号
**传真 Fax:** +0086-551-64683490 **营业执照注册号 Business License Reg. No.:** 91340100575703313N
**海关注册编码 Customs Reg. Code:** 3401961393