ASIA PACIFIC INDUSTRY GROUP CO., LIMITED
Tel +0086-551-64687285
Email sales@boppfilmsales.com
www.boppfilmsales.com · www.apigcl.com

0.66 kV Split-Core Current Transformer (5 A) - PE 薄膜 — 规格表

Document No. 文件编号	Revision 版本	Issue date 签发日期	Document type 文件类型
APIG-SPC-CT-066K-2026	**Rev. 2.0**	**2026-11-09**	**Specification / 规格表**

1 • DOCUMENT INFORMATION 文档信息

Item 项目	Description 说明
Document type 文件类型	Specification / 规格表
Subject 主题	0.66 kV Split-Core Current Transformer (5 A) - Specification
Specification basis 规格依据	APIG product specification 亚太工业集团产品规格
Issue 签发	2026-11-09 · Rev. 2.0
Language 语言	Bilingual headings — English / 中文

2 • TECHNICAL CONTENT 技术内容

Specification	Ratedcurrentratio	Precisiondegree	Column 4	Straight- through	Max cable . outerdiameter
	tums	(mm)			
	1				
	(150-200)A/5(1)A	1		1	Φ24
	15	1			
	(300-400)A/5(1)A	15		1	Φ36
	15	1			
	500A/5(1)A	15		1	Φ50
	25	1			
	5	1			
	10	1			

Product / packing view 1 产品 / 包装实拍 1

1 API-0.66/K-Φ Split current transformer 1.Product feature The appearance is nice and the installation and wiring are convenient. API-0.66/K-Φ series split current transformers are mainly used in reconstructing projects of urban and rural power grids. Product has the advantages of small size, high accuracy, strong load capacity, easy installation, etc.They save the manpower, material resources and financial resources and improve the efficiency of users. 2.Explanation for type 3. Spec. and size Note: Primary current flow from P1 to P2. The black second wiring is S2,the red is S1.The outlet length is 1m ± 10cm. Outline size Through size Tolerance W H D M N Φ1 Φ2 K-Φ24 39 70.5 55 36 52 24.5 23 ±1 K-Φ36 42.5 81.5 67 40 56 33.5 35 K-Φ50 46.5 110 90 54 66.5 47 52 Size（mm） Type Rated current ratio Split Rated voltage,kV Code of product series · 2 4.Cross-reference tables of spec.

以下数据为本产品技术规格，随货签发检验记录。

–parameter 5.Technical indicators □ Rated operation voltage AC 0.66kV □ Rated frequency 50-60Hz □ Ambient air temperature -30℃-70℃ □ Height above sea level≤3000m □ Power frequency withstand voltage 3000v/1min 50Hz □ Used in place without direct rain and snow,without severe pollution and acute shock 6.Installation Rated current ratio (A) Precision degree Straight- through tums Max. cable outer diameter (mm) 0.5 1 K-Φ24 (150-200)A/5(1)A 1 1 Φ24 (250-300)A/5(1)A 1.5 1 K-Φ36 (300-400)A/5(1)A 1.5 1 Φ36 (500-600)A/5(1)A 1.5 1 K-Φ50 500A/5(1)A 1.5 1 Φ50 (600-700)A/5(1)A 2.5 1 (800-900)A/5(1)A 5 1 1000A/5(1)A 10 1 ·

3 • NOTES 说明

ASIA PACIFIC INDUSTRY GROUP CO., LIMITED
Tel +0086-551-64687285
Email sales@boppfilmsales.com
www.boppfilmsales.com · www.apigcl.com

This document states the standard specification of the product. Values apply to the grades listed here; the tolerance range agreed in the order confirmation and the technical agreement prevails for any specific order. Batch test records are issued with the goods on request.

PHOTOS 实拍图片

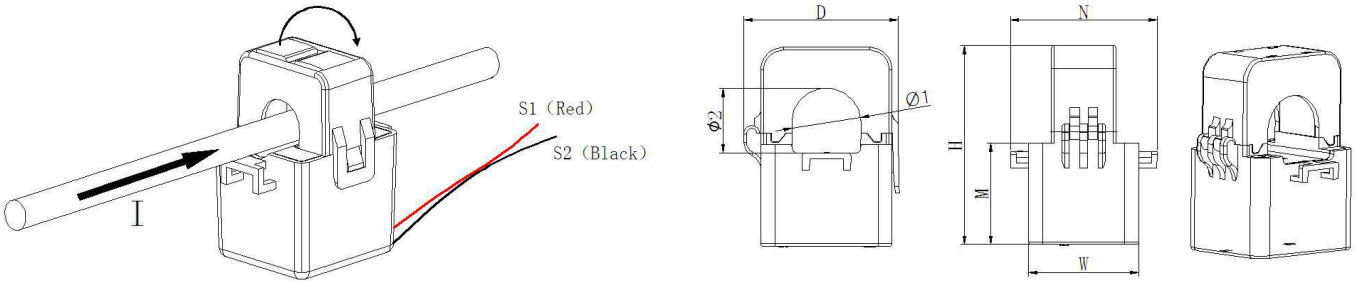

Product view 1 产品实拍 1

地址 ADD.: No.3399, Luzhou Ave., Baohe Dist., Hefei, Anhui 230051, China | 安徽省合肥市包河区庐州大道3399号
传真 Fax: +0086-551-64683490 **营业执照注册号 Business License Reg. No.:** 91340100575703313N
海关注册编码 Customs Reg. Code: 3401961393